



Dual Glass Series

AOX-72M10HC 580W-615W

HIGH VALUE

Low LCOE, reduced BOS cost, quick payback.

More harvest with N-type TOPCon.

Compatible, efficient container use cuts freight.

HIGH POWER UP TO 615W

23.8% module efficiency, dense interconnect.

SMBB for trapping, lower resistance, better collection.

RELIABLE

Fewer micro-cracks, PID resistant, endure harsh conditions.


Mechanical performance up to 5400 Pa positive, 2400 Pa negative.

HIGH ENERGY YIELD

Excellent IAM, low irradiation validated by 3rd party certs.

Lower degradation: 1% first year, 0.4% annually.

Lower temperature coefficient (-0.30%).

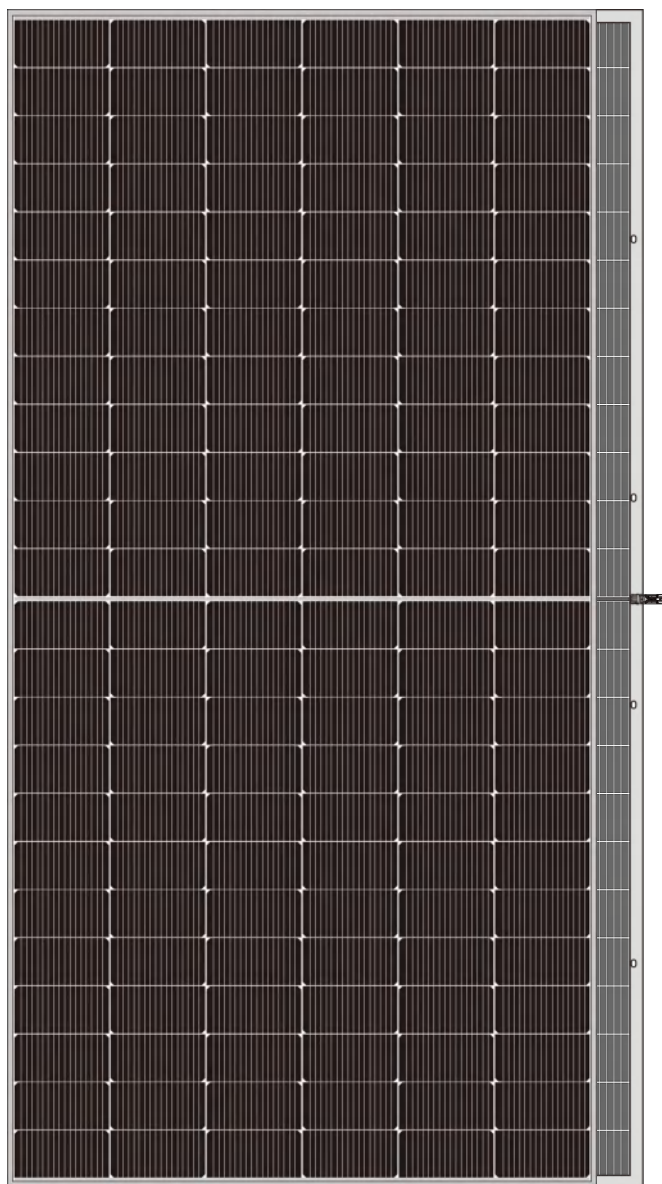

N-TopCon Technology

Enhance efficiency, reduce micro-cracks.




PRODUCT Certifications




PRODUCT Warranty

12-year Warranty for Materials and Processing

30-year Warranty for Extra Linear Power Output

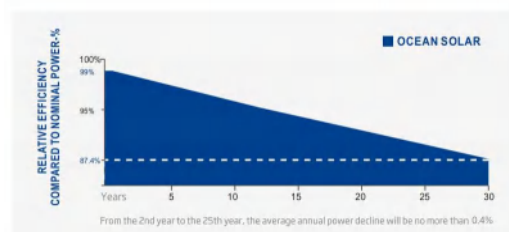

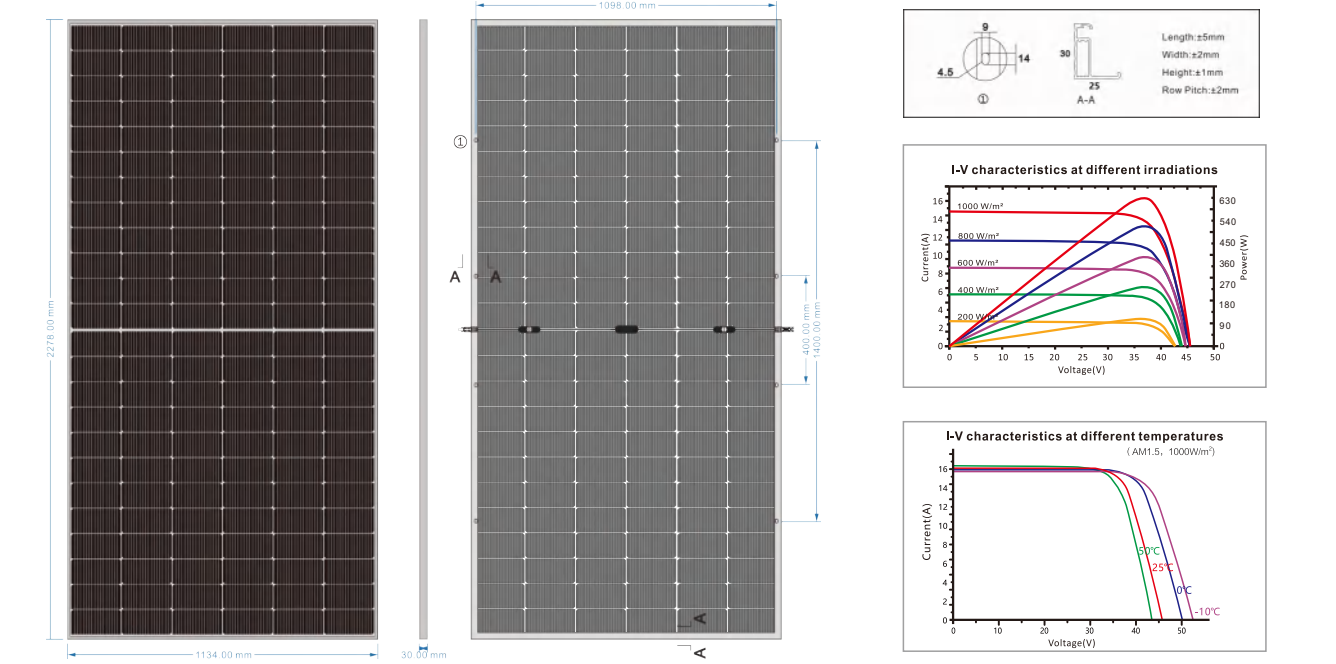

Electrical Characteristics																	
STC:AM1.5 1000W/m² 25°C NOCT:AM1.5 800W/m² 20°C 1m/s Test uncertainty for Pmax:±3%																	
Module Type		AOX-72M10HC580W		AOX-72M10HC585W		AOX-72M10HC590W		AOX-72M10HC595W		AOX-72M10HC600W		AOX-72M10HC605W		AOX-72M10HC610W		AOX-72M10HC615W	
Testing Condition		STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power(Pmax/W)		580W	438W	585W	442W	590W	446W	595W	450W	600W	454W	605W	458W	610W	462W	615W	466W
Voltage at Maximum Power(Vmp/V)		43.50	40.70	43.70	40.90	43.90	41.10	44.10	41.30	44.30	41.50	44.50	41.70	44.70	41.90	44.90	42.10
Current at Maximum Power(Imp/A)		13.34	10.76	13.37	10.81	13.44	10.86	13.50	10.90	13.55	10.94	13.60	10.99	13.65	11.03	13.70	11.07
Open Circuit Voltage(Voc/V)		50.50	47.70	50.70	47.90	50.90	48.10	51.10	48.30	51.30	48.50	51.50	48.70	51.70	48.90	51.90	49.10
Short Circuit Current(Isc/A)		14.08	11.36	14.14	11.41	14.19	11.46	14.25	11.51	14.30	11.55	14.35	11.60	14.41	11.64	14.46	11.68
Module Efficiency(%)		22.40%		22.60%		22.80%		23.00%		23.20%		23.40%		23.60%		23.80%	

Mechanical Parameters		Operating Parameters	
Cell Type	N-Type TopCon Half-cut Cell	Operational Temperature	-40~+85°C
No. of Cells	144	Power Output Tolerance	0~5W
Front Cover	2.0 mm glass, high transmission, AR coated, tempered	Voc and Isc Tolerance	±3%
Encapsulation	EVA	Maximum System Voltage	1500VDC(IEC)
Back Cover	2.0mm,HeatStrengthenedGlass	Maximum Series Fuse Rating	25A
Junction Box	IP68 rated, 3 bypass diodes	Nominal Operational Cell Temperature	43±2°C
Frame	30 mm anodized aluminium alloy	Protection Class	Class II
Cable	1 x 4 mm², 350 mm length or customized	Fire Rating	UL type 1 or 2 IEC Class C
Connectors	MC 4/ MC 4 compatible	Temperature Ratings(STC)	
Weight	31.5kg	Temperature Coefficient of Isc	0.04%/°C
Dimension	2278*1134*30mm	Temperature Coefficient of Voc	-0.24%/°C
Packaging	740pcs/40HQ Container	Temperature Coefficient of Pmax	-0.30%/°C

Mechanical Loading		Bifacial Output-Rearside Power Gain	
Snow Load	5400 Pa or 550 kg/m²	5%	Maximum Power (Pmax) Module Efficiency STC(%)
Wind Load	2400 Pa or 244 kg/m²		609W 614W 620W 625W 630W 635W 641W 646W 23.5% 23.7% 23.9% 24.2% 24.4% 24.6% 24.8% 25.0%
Hail Resistance	Max. Ø 25 mm at 23 m/s	10%	Maximum Power (Pmax) Module Efficiency STC(%)
			638W 649W 655W 660W 666W 671W 677W 24.6% 24.9% 25.1% 25.3% 25.5% 26.0% 26.2%